



iX T10F-2

Basic industrial operator panel

The iX T10F-2 is a 10-inch industrial operator panel with high-resolution touch-screen and modern design. This model combines IP65 grey plastic housing with the full version of the iX HMI software, making it a cost-effective yet advanced HMI. The panel offers Ethernet, serial and USB ports as standard.

A world of hardware choices


The iX T10F-2 panel adds strength to Beijer Electronics' total HMI offer including industrial panels, specialized panels designed for rugged and marine environments and even panels with integrated CODESYS soft control and soft motion.

Smarter iX HMI software

The iX HMI software provides smart tools to communicate efficiently on all hardware. It combines top-class vector graphics and easy-to-use functions that provide intuitive and reliable operation. And it gives almost limitless connectivity through the extensive list of drivers.



- 10", 800 × 480 pixel (16:9), TFT-LCD touch screen
- Application storage 200 MB
- 1 × Ethernet, 4 × serial, 1 × USB as standard
- Operating temperature -10 to +50 °C
- CE, FCC and KCC certifications

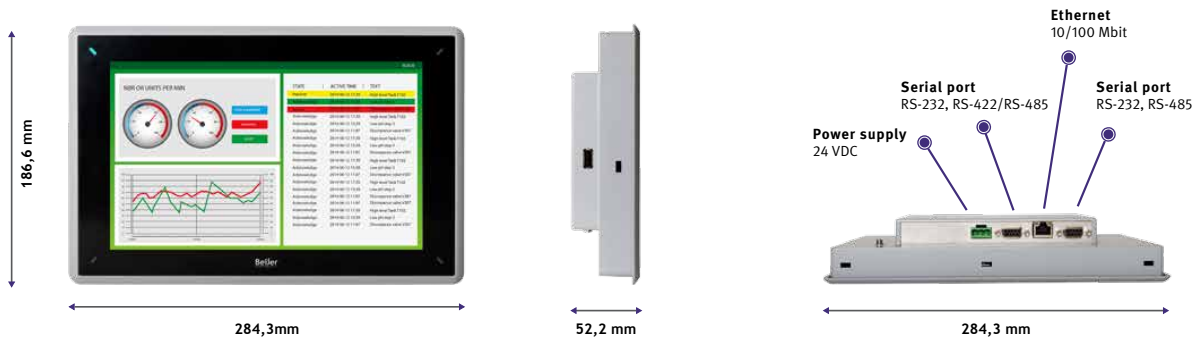

	ix T710F-2
General Description	
Article number	630005301
HMI development software	ix Developer 2.10 SP2 + T10F-2 AddOn
System Info	
RAM	128 MB
CPU	ARM9 400MHz
Application storage	200 MB
Display	
Type	TFT LCD, 800 × 480 pixels, 64K colors
Size	10" inch
Backlight	LED
Backlight lifetime	20,000 hrs
Brightness	350 cd/m²
Interaction	
External control	N/A
Front LED	1 × blue/red software programmable
Touch screen type	Resistive type
Power	
Power consumption at rated voltage	10.8 W
Voltage	+24 VDC
Fuse	Internal DC fuse, 2.0 AT, 5 × 20mm
Mechanical	
Size	284.3 × 186.6 × 52.2 mm
Weight	1.3 kg
Housing material	Plastic
Serial Communication	
Com 1	RS232
Com 2	RS422/485
Com 3	RS232
Com 4	RS485
Ethernet	
Ethernet 1	1 × 10/ 100 Base-T (shielded RJ45)
Ethernet 2	N/A
Expansion	
USB	1 × USB 2.0, max. 400 mA
Memory expansion	N/A
ix Field buss expansion	N/A
Certifications	
UL, DNV, GL, LR, RS, BV	N/A
FCC	FCC part 15
KCC	KCC
CE	Noise tested according to EN55022: 2010 Class A
Environmental	
Sealing - back panel	IP20
Humidity	<85 % non-condensed
Storage temperature	-20° to + 60°C
Operating temperature	-10° to + 50°C
Sealing - front panel	IP65

The information at hand is provided as available at the time of printing, and Beijer Electronics reserves the right to change any information without updating this publication. Beijer Electronics does not assume any responsibility for any errors or omissions in this publication.